
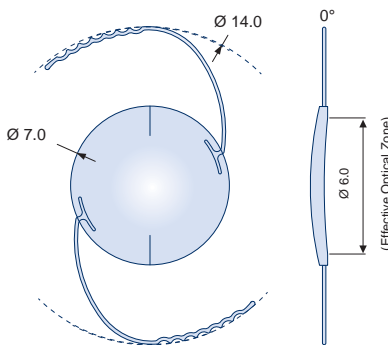
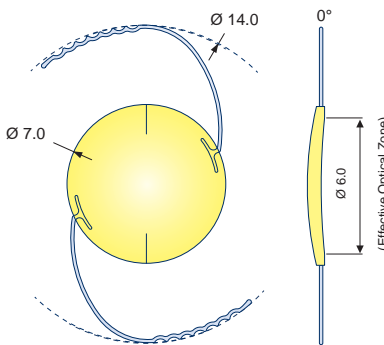


## TORICA®-sPB /sPBY

TECHNICAL INFORMATION	
TORIC 3-PIECE ADD-ON  	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p><b>TORICA®-sPB</b> MS 714 TPB</p>  </div> <div style="text-align: center;"> <p><b>TORICA®-sPBY YELLOW</b> MS 714 TPB-Y</p>  </div> </div>
Type	foldable toric posterior chamber Add-On IOL for sulcus fixation in pseudophakic eyes three-piece with undulated modified C-loop haptics
Material	optic: silicone with UV-absorber, haptics: high molecular PMMA
Specifics	toric anterior surface blue light protection optional convex-concave
Diopter Range	<i>more details on diopter categories see page 2</i>
Sphere in 0.5 D steps	-6.0 to 3.0 D
Sphere in 1.0 D steps	-30.0 to -7.0 D 4.0 to 6.0 D
Cylinder in 0.5 D steps	----
Cylinder in 1.0 D steps	1.0 to 30.0 D
Cylinder Axis	the two thin diametrically opposed lines in the periphery of the optic indicate the axis of the plus-cylinder
Est. A-const <sup>(1)</sup>	not applicable (by application principle)

<sup>(1)</sup> For more details please visit [www.humanoptics.com](http://www.humanoptics.com)

<sup>(2)</sup> The word „aberration“ as used in this document refers to „spherical aberration“

